


## IA\_KS-1W & IA\_S-1W Series

### 1W, FIXED INPUT, ISOLATED & REGULATED DUAL OUTPUT DC-DC CONVERTER

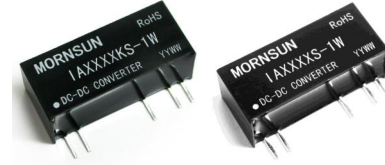

RoHS

#### FEATURES

Small Footprint  
SIP Package  
1KVDC Isolation  
Temperature Range: -40°C to +85°C  
No Heat sink Required  
Internal SMD Construction  
No External Component Required  
Industry Standard Pinout  
RoHS Compliance

#### APPLICATIONS

The IA\_KS-1W & IA\_S-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 5\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

#### PRODUCT PROGRAM


Part Number	Input		Output			Efficiency (% , Typ)	Switching frequency (KHz, Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
IA0505S-1W	5	4.75-5.25	$\pm 5$	$\pm 100$	$\pm 10$	69	83
IA0505KS-1W			$\pm 5$	$\pm 100$	$\pm 10$	54	83
IA0509KS-1W			$\pm 9$	$\pm 56$	$\pm 6$	63	83
IA0512KS-1W			$\pm 12$	$\pm 42$	$\pm 5$	63	83
IA0515KS-1W			$\pm 15$	$\pm 33$	$\pm 4$	65	250
IA1205S-1W	12	11.4-12.6	$\pm 5$	$\pm 100$	$\pm 10$	72	100
IA1205KS-1W			$\pm 5$	$\pm 100$	$\pm 10$	56	83
IA1209KS-1W			$\pm 9$	$\pm 56$	$\pm 6$	62	83
IA1212KS-1W			$\pm 12$	$\pm 42$	$\pm 5$	65	83
IA1215KS-1W			$\pm 15$	$\pm 33$	$\pm 4$	66	83
IA2405S-1W	24	22.8-25.2	$\pm 5$	$\pm 100$	$\pm 10$	72	83
IA2405KS-1W			$\pm 5$	$\pm 100$	$\pm 10$	54	83
IA2409KS-1W			$\pm 9$	$\pm 56$	$\pm 6$	62	83
IA2412KS-1W			$\pm 12$	$\pm 42$	$\pm 5$	64	83
IA2415KS-1W			$\pm 15$	$\pm 33$	$\pm 4$	66	300

#### ISOLATION SPECIFICATIONS

Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

#### MODEL SELECTION

IA0505KS-1W

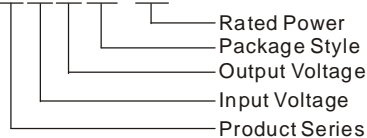

#### OUTPUT SPECIFICATIONS

Item	Test condition	Min	Typ	Max	Units
Output power		0.1		1	W
Line regulation	For $V_{in}$ change of $\pm 5\%$			$\pm 0.25$	%
Load regulation	10% to 100% full load			$\pm 1$	
Output voltage accuracy	100% full load			$\pm 3$	
Temperature drift	100% full load			0.03	$\%/^{\circ}\text{C}$
Output ripple*	20MHz Bandwidth		10	20	mVp-p
Output Noise*	20MHz Bandwidth		50	100	

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at  $T_A = 25^{\circ}\text{C}$ , humidity  $< 75\%$ , nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

**MORNSUN Science & Technology co.,Ltd.**

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272


<http://www.mornsun-power.com>

## COMMON SPECIFICATION


Item	Test Conditions	Min	Typ	Max	Units
Storage humidity range				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Lead temperature	1.5mm from case for 10 seconds			300	
Temp. rise at full load			20	30	
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection	IAXX05S-1W	Continuous			
	Others*			1	s
MTBF		3500			K hours
Weight			5.2		g

\*Supply voltage must be discontinued at the end of short circuit duration.

## TYPICAL CHARACTERISTICS

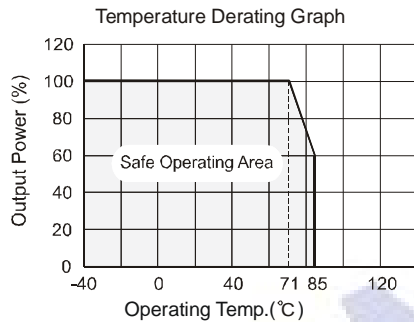

## OUTLINE DIMENSIONS & PIN CONNECTIONS

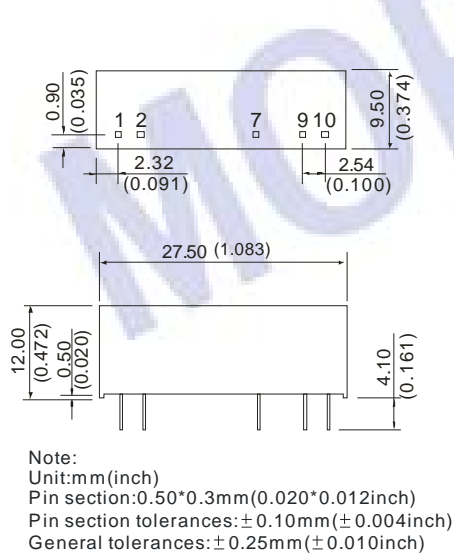


## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

### Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).



(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (uF)	Vout (VDC)	Cout (uF)
5	4.7	±5	4.7
12	2.2	±9	2.2
24	0.47	±12	1
-	-	±15	0.47

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

### Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).



(Figure 2)

**When the environment temperature is higher than 71°C, the product output power should be less then 60% of the rated power.**

**No parallel connection or plug and play.**

**Use dual output simultaneously, forbid opening output pin (0V) to use as single output.**